

Debye-Waller parameterization of an entekagonal quasisausage in broken-rational Knusper-spaces

Amelie K. Alpher¹, Bert K. Bethe², Galina C. Gamov³

¹Center of Transcendental Excellence, International University of Groß-Klüngeisdorf, Amelie.K.Alpher@excellence.IUGK.de, Germany, ²Heisental Institute for Fuzzy Sciences, Sachsenfurt, Germany, ³Academy of the Arts of Beyond, Nowo Starograd, Bulgaria

This here would be the main body text of your abstract. You can include references in the format indicated below, and you can include figures or tables. Figures should have a figure caption, tables should have a table heading. Submit your 1-page abstract in a ready-to-print form. Use margins of 3.5 cm at the top and 2.5 cm at the bottom, left and right 2.5 cm. Use 12 pt CAMBRIA in bold face and single spaced for your title. The title should be followed by a blank line. Next should be the authors names (11pt Cambria single-spaced), each followed by a superscript number linking the author to the affiliation (see above). Underline the presenting author's name. After another blank line type the affiliations in 11pt Cambria single-spaced. Give the e-mail address of the presenting author only, unless other e-mail addresses are indispensable. Add more address details if needed to unequivocally locate your institution in a www search. For the main body of text use Cambria 11 pt with 1.1 line spacing.

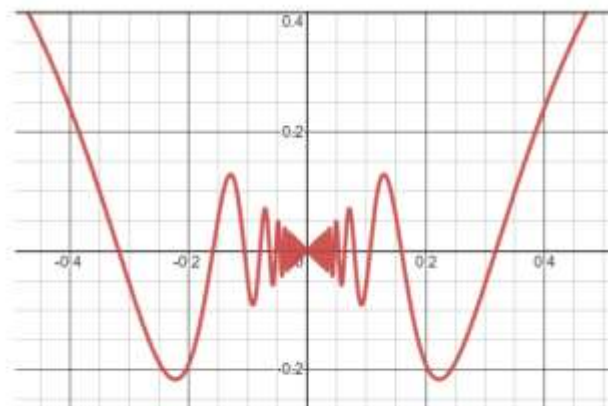


Fig. 1 The Sausage factor for Knusper space dimension 3/7

Many scientists would agree that a good abstract is better than a useless one [1] and that figures should be clearly readable. Although this is generally accepted today, it is also well known [2] that sausage factors apply to abstract thermodynamics. The approach is generally written as :

$$G = U + PV - TS \quad (1)$$

where G is the reviewer catchment potential, $-2\pi U$ is the internal scientific content, P is the applied supervision pressure, V is the elastic response of the student, T is the timeliness, and S is the entropic Sausage factor of self-organization [1] in the Debye-Waller approximation [2]. Here our work emphasizes quasi-disordered systems with strangely attractive behavior in broken-dimensional Knusper spaces (BDKnS). Our result (Fig. 1) vaguely suggests that refinements with $Rwp < 0.23\%$ [2] can be reliably achieved by retro-guessing the fuzzy measured data in BDKnS with $D=3/7$ and refitting with a trans-sufficient parameter set. To achieve convergence for an abstract submission (eq. 1) in this context, the number of parameters should exceed the number of quasi-observations (N_{quao}) at least by $(3/7)^{-1}$, while background MUST be floating by a Chebyshev polynomial of degree $n > 4\pi^2 [\sin(\Theta_{\text{max}})/\lambda] * N_{\text{quao}}$, with classical Θ and λ [2].

[1] Hinz H, Kunz K. A lonely singular opinion on quality of communication that nobody shares except ourselves. J. Communication Culture, 11, 69-84 (2011)

[2] Well ARD, Known BBC, Never MIND, Bother DONT. (eds.) International Tables for Everything that is Well Known and Nobody Bothers to Reference Properly. Volume G: Definition and exchange of data. First online edition (2006), <https://doi.org/10.1107/123456789>, ISBN: 999-111-4711-0815,

A.K.A. acknowledges support by DFG under grant number Alph999/99-0.